

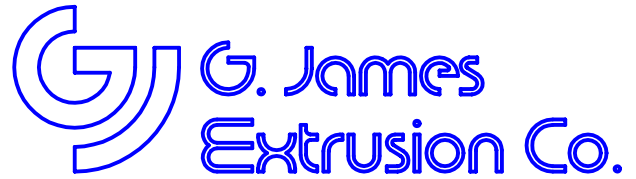
= 2/3 STD TOLERANCE

SECTION DATA:
 I_{xx} = 527 mm⁴
 I_{yy} = 527 mm⁴
 Theta = 1.0
 RadG_x = 4. mm
 RadG_y = 4. mm
 X_{Cleft} = 6.0 mm
 X_{Cright} = 6.0 mm
 Y_{Ctop} = 6.0 mm
 Y_{Cbot} = 6.0 mm
 Z_{xxtop} = 88 mm³
 Z_{xxbot} = 88 mm³
 Z_{yyleft} = 88 mm³
 Z_{yyright} = 88 mm³

1.00 TYP WALL THICKNESS
UNLESS OTHERWISE SPECIFIED

0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

			B	AREA	34.6	SQ MM	 G. James Extrusion Co. A.C.N 010 828 234 1082 KINGSFORD SMITH DRIVE, EAGLE FARM, QUEENSLAND, 4009 PO BOX 1376, EAGLE FARM BC, 4009 PHONE : (07) 3877 2833 FAX : (07) 3877 2890	CUSTOMER		G. JAMES EXTRUSION Co.	
				WEIGHT	0.094	KG M		CUSTOMER PART NAME		NO.	
				PERIMETER	69.1	MM		12 x 1.0 ROUND TUBE			
				ANOD PERIM	37.7	MM		SCALE	TOLERANCES IN ACCORDANCE WITH AS 1866-1986 APPLY UNLESS OTHERWISE SPECIFIED		
				PAINT PERIM	100.0	MM		5:1			
				C CIRCLE DIA	12.	MM		DRAWN	CHECK	DATE	DWG. NO.
				FACTOR	738.	MM		SPG		12/10/94	950-008
				ALLOY	6063	MM					
				TEMPER	T6	MM					
1	12/03/99	PAD	0.25 TOL WAS 0.36 TOL C/N 3286								
NO	DATE	DR	REVISION								