


SECTION NO.

950-185

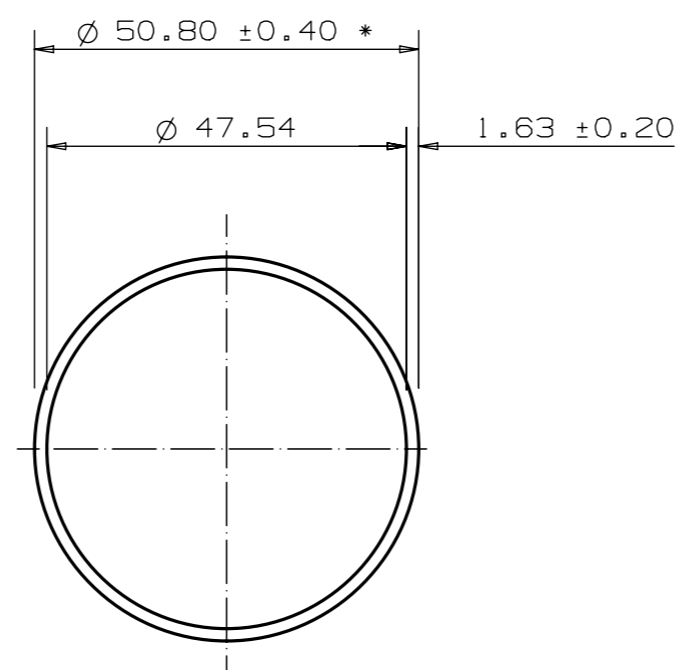

NATA CERTIFICATION REQUIRED

* = 1/2 STANDARD TOLERANCE

TOTAL SURFACE EXPOSED

SECTION DATA:

 $I_{xx} = 76\,177\text{ mm}^4$ $I_{yy} = 76\,177\text{ mm}^4$ Theta = 1.0° RadG_x = 17 mmRadG_y = 17 mmXC_{Right} = 25.4 mmXC_{Left} = 25.4 mmYC_{top} = 25.4 mmYC_{bot} = 25.4 mmZ_{xx}_{top} = 2 999 mm³Z_{xx}_{bot} = 2 999 mm³Z_{yy}_{right} = 2 999 mm³Z_{yy}_{left} = 2 999 mm³0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

NO	DATE	DR	REVISION	AREA	WEIGHT	PERIMETER	ANOD PERIM	PAINT PERIM	C CIRCLE DIA	FACTOR	ALLOY	TEMPER	CUSTOMER							
2	12/09/12	SPG	ALLOY WAS 6351 C/N 9451	251.8	0.682	308.9	159.6	159.6 (0.0)	51	453	NC6351	T5	G. JAMES EXTRUSION Co.							
1	20/01/10	PAD	ALLOY & TEMPER WERE 6063 T6 C/N 8416	SQ MM	KG M	MM	MM	MM	MM				CUSTOMER PART NAME NO. 50.8 x 1.63 ROUND TUBE							
			A										SCALE		TOLERANCES IN ACCORDANCE WITH AS/NZS 1866:1997 APPLY UNLESS OTHERWISE SPECIFIED					
													1 : 1							
													DRAWN		CHECK		DATE		DWG. NO.	
													JWC				06/04/87		950-185	

**G. James
Extrusion Co.**

A.C.N 010 828 234

1082 KINGSFORD SMITH DRIVE, EAGLE FARM, QUEENSLAND, 4009

PO BOX 1376, EAGLE FARM BC, 4009

PHONE : (07) 3877 2833 FAX : (07) 3877 2890