SECTION NO.
950-228

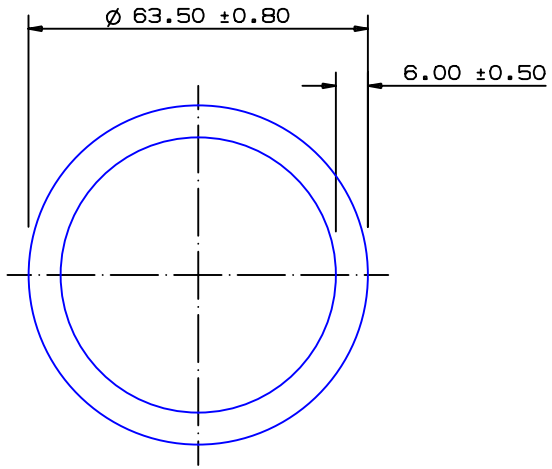

THIS SECTION IS SUITABLE FOR NV6082 T6
APPLICATIONS FOR SYDNEY PRESS ONLY

TOTAL SURFACE EXPOSED

SECTION DATA:
I_{xx} = 452 812 mm⁴
I_{yy} = 452 812 mm⁴
Theta= 1.0 °
$RadG_{x}$ = 20 mm
$RadG_{y}$ = 20 mm
XC_{Right} = 31.8 mm
XC_{Left} = 31.8 mm
YC_{top} = 31.8 mm
YC_{bot} = 31.8 mm
$Z_{xx}top$ = 14 262 mm³
$Z_{xx}bot$ = 14 262 mm³
$Z_{yy}right$ = 14 262 mm³
$Z_{yy}left$ = 14 262 mm³

0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : STRUCTURAL

NO	DATE	DR	REVISION
			A
1	12/04/12	SPG	'DNV' NOTE ADDED C/N 9239

AREA	1083.8	SQ MM
WEIGHT	2.937	KG M
PERIMETER	361.3	MM
ANOD PERIM	199.5	MM
PAINT PERIM	199.5 (0.0)	MM
C CIRCLE DIA	64	MM
FACTOR	123	
ALLOY	6063	
TEMPER	T6	

G. James Extrusion Co.
A.C.N 010 828 234
1082 KINGSFORD SMITH DRIVE, EAGLE FARM, QUEENSLAND, 4009
PO BOX 1376, EAGLE FARM BC, 4009
PHONE : (07) 3877 2833 FAX : (07) 3877 2890

© COPYRIGHT 2004
THIS DRAWING IS THE PROPERTY OF
G.JAMES EXTRUSION CO. PTY LTD
ALL RIGHTS RESERVED

CUSTOMER: G. JAMES EXTRUSION Co.
CUSTOMER PART NAME NO.: 63.50 x 6.0 ROUND TUBE
SCALE: 1:1
TOLERANCES IN ACCORDANCE WITH AS/NZS 1866:1997 APPLY UNLESS OTHERWISE SPECIFIED
DRAWN: SPG
CHECK:
DATE: 23/02/96
DWG. NO.: 950-228