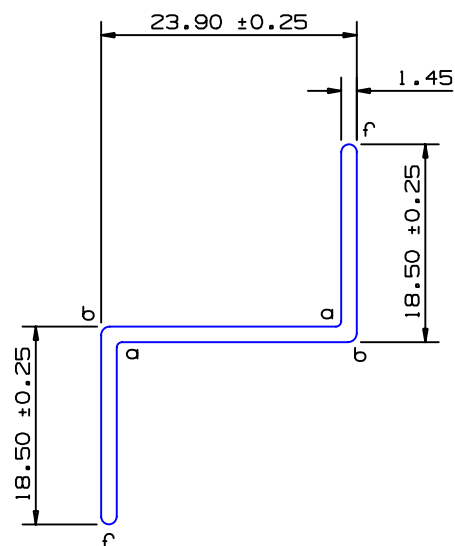



SECTION NO.

964-013

ACTUAL SIZE  
NO EXPOSED SURFACE

MOMENTS OF INERTIA:

$$I_{xx} = 5\,295 \text{ mm}^4$$

$$I_{yy} = 7\,805 \text{ mm}^4$$

a = 0.50 radius  
b = 0.80 radius  
f = full radius

1.45±0.15 TYP WALL THICKNESS  
UNLESS OTHERWISE SPECIFIED

0.40 RADIUS ON ALL OUTSIDE CORNERS  
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

48264

AREA	83.5	SQ MM
WEIGHT	0.226	KG M
PERIMETER	116.5	MM
ANOD PERIM	116.5	MM
PAINT PERIM	116.5 (0.0)	MM
C CIRCLE DIA	42	MM
FACTOR	515	
ALLOY	6063	
TEMPER	T5	



**G. James  
Extrusion Co.**

A.C.N 010 828 234  
1082 KINGSFORD SMITH DRIVE, EAGLE FARM, QUEENSLAND, 4009  
PO BOX 1376, EAGLE FARM BC, 4009  
PHONE : (07) 3877 2833 FAX : (07) 3877 2890

© COPYRIGHT 2004  
THIS DRAWING IS THE PROPERTY OF  
G. JAMES EXTRUSION CO. PTY LTD  
ALL RIGHTS RESERVED

CUSTOMER

G. JAMES EXTRUSION Co.

CUSTOMER PART NAME

NO.

23.9 x 18.5 x 1.45 'Z' SECTION

SCALE

2:1

TOLERANCES IN ACCORDANCE WITH AS/NZS 1866:1997  
APPLY UNLESS OTHERWISE SPECIFIED

DRAWN

PAD

CHECK

DATE

07/08/08

DWG. NO.

964-013

1

08/08/08

PAD

1.45 HORIZ AND L/H WALLS WERE 1.20 AND 1.30

NO

DATE

DR

REVISION