
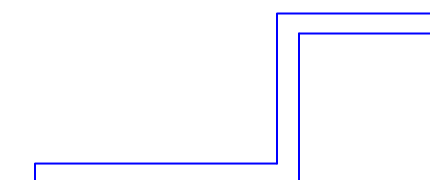


964-007

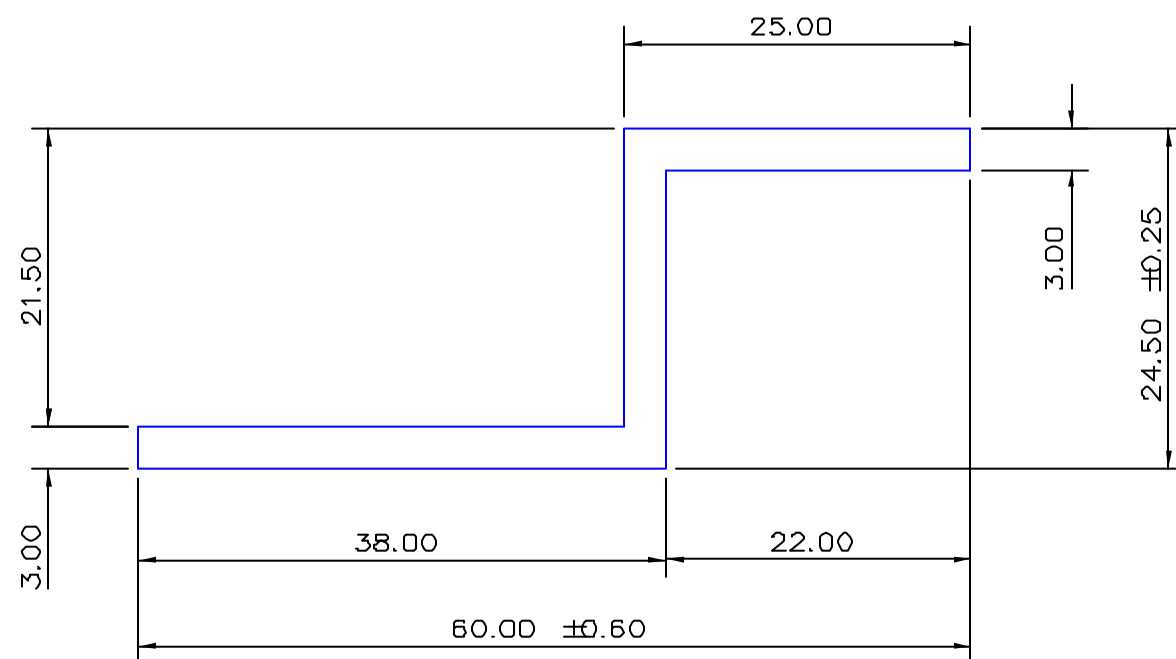

ACTUAL SIZE
NO EXPOSED SURFACE

SECTION DATA:
 $I_{xx} = 22\,847 \text{ mm}^4$
 $I_{yy} = 56\,055 \text{ mm}^4$
 $\text{Theta} = -60.$
 $\text{RadG}_x = 10. \text{ mm}$
 $\text{RadG}_y = 15. \text{ mm}$
 $\text{XC}_{\text{Right}} = 28.3 \text{ mm}$
 $\text{XC}_{\text{Left}} = 31.7 \text{ mm}$
 $\text{YC}_{\text{top}} = 14.0 \text{ mm}$
 $\text{YC}_{\text{bot}} = 10.5 \text{ mm}$
 $\text{Z}_{\text{xx}}^{\text{top}} = 1\,636 \text{ mm}$
 $\text{Z}_{\text{xx}}^{\text{bot}} = 2\,169 \text{ mm}$
 $\text{Z}_{\text{yy}}^{\text{right}} = 1\,982 \text{ mm}$
 $\text{Z}_{\text{yy}}^{\text{left}} = 1\,767 \text{ mm}$

3.00 ±0.15 TYP WALL THICKNESS
UNLESS OTHERWISE SPECIFIED

0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

				244.5		G. JAMES EXTRUSION Co.		
				0.663		'Z' SECTION		
				169.0		2:1		
				169.0		PAD	18/01/99	964-007
				169.0				
				65.				
				255.				
				6063				
				T6				